




# Assembly Instructions

ITEM NO.: 31028

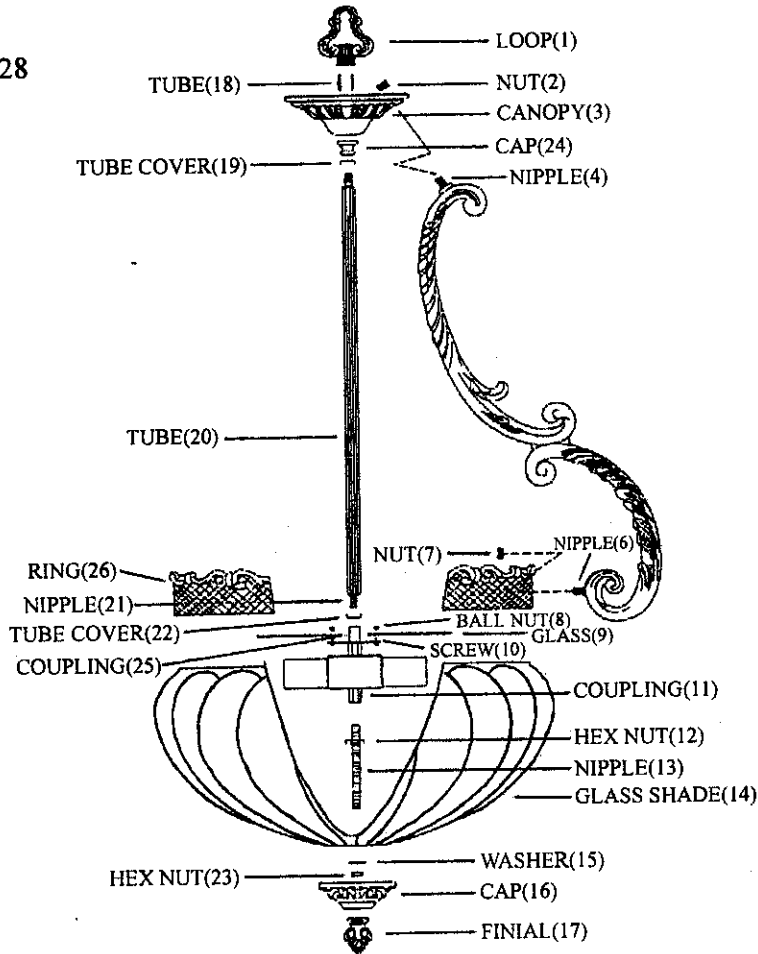

1. Carefully remove the fixture out of the carton, and check that all parts are included referring to the above illustration. Make sure not to misplace any parts that are needed for the installation;
2. Screw the NIPPLE(21) into the COUPLING(25), slide the TUBE COVER(22), TUBE(20), TUBE COVER(19), CAP(24), CANOPY(3), TUBE(18) onto the NIPPLE(21), then secure them with LOOP(1);
3. Protrude the NIPPLE(6) through the hole of RING(26), then fix it by NUT(7), then protrude the NIPPLE(4) through the hole of CAP(3), then fix it by NUT(2);
4. Thread the HEX NUT(12) onto the NIPPLE(13), then screw the NIPPLE(13) into the COUPLING(11);
5. Slide the GLASS SHADE(14), WASHER(15) onto the NIPPLE(13) properly, then secure them with HEX NUT(23);
6. Slide the CAP(16) onto the NIPPLE(13), then fix it by FINIAL(17);
7. Slide the GLASS(9) onto the SCREW(10), then fix it by BALL NUT(8);
8. Install the lamps on;